



No residue™ flux IF 2005M

INTERFLUX®
ELECTRONICS N.V.



Technical data IF 2005M
Ver: 1.1, 06-feb-08
latest version on www.interflux.com

Page 1

No clean, halide free, No residue™ soldering flux

Description:

Interflux® IF 2005M is a low solids no-clean flux, designed to evaporate during the soldering process. This means also the safest no-clean flux for high-tech circuits.

With no rosin or resin to create sticky residue, there is nothing left after wave soldering to foul test pins or prevent electrical contact.

This halide free flux meets all Bellcore and IPC requirements and is QPL- listed (approved to MIL-F-14256F). It is formulated to provide the best combination of solder ability, ease of processing and reliability. Great solder ability on HAL, Ni Au, ImSn, ImAg and OSP coated PCB's.

IF2005M has also excellent solder ability on lead-free alloys. It is resistant to elevated preheating temperatures, and to a long wave contact time with a higher working temperature.

Interflux® IF 2005M is made to

work well in foam fluxers, while also being compatible with spray and wave fluxing equipment. It has a longer pot life in the foam fluxer than synthetic fluxes, making it the most cost-effective choice for no clean soldering.

The IF 2005M is classified OR/L0 per IPC J-STD-004.

IF 2005M is used in the refillable flux pens for hand soldering.



More information:

<i>Flux application</i>	2
<i>Pre heat settings</i>	2
<i>Wave contact</i>	2
<i>Product handling</i>	3
<i>Test results</i>	3
<i>Packaging</i>	4

Key advantages:

- QPL listed
- Halide free
- For lead free and lead soldering
- No residue™ technology

Physical properties

Appearance	Clear colourless liquid
Solid content	1,85% ± 0,15
Density at 20°C	0,807—0,809 g/ml
Water content	3-4%
Acid number	14 – 16 mg KOH/g
Flash point T.O.C	15°C (59°F)



Application of the flux

The IF 2005M is designed to be applied by means of a variety of different systems.

1. Foam fluxing:

To ensure good foaming, the level of flux needs to be at least 2–3 cm over the porous flux stone. The use of an air knife is imperative.

2. Spray fluxing:

It is advised to use a double spray stroke during fluxing, when-

ever possible and to keep the flux pressure low. The nozzle traverse speed is set to a value which ensures that every point on the boards are sprayed twice from two different sides. Resulting in a 50% overlap on the spray pattern. This will give the most uniform spray pattern coverage. Spray pattern coverage can be

checked by passing a piece of cardboard through the spray fluxer. Remove it before the pre heat unit. Additionally the spray fluxer settings need to be checked by passing a glass plate or empty circuit board through the fluxer. Remove it from the machine before it reaches the pre heater unit and is checked on flux quantity. There may be no

drops present. Drops are a sign of excessive flux and are difficult to evaporate. Reduce the flux amount until defects typical for a too low flux amount like, webbing, flagging, shorts and icicles are observed. From this point increase the flux level again until defects disappear.

3. Flux pen:

For rework and hand soldering operations

Preheating

The recommended preheat temperature measured on the top-side of the boards is 100°C-130°C.

The flux can have lower preheating T° as long as the solvent is evaporated before wave contact.

Avoid hot air convection pre heater settings above 150°C


Preheat slope:

typical: 1,5°C/s
min: 1,0°C/s
max: 2,5°C/s

Wave contact

Typical wave contact or dwell time value is 4,5s when using a single solder wave. For double wave soldering systems the values will be 2s for the first wave and 3,5s for the second wave. Lower total dwell time limit is 2s. Solder wetting can

be optimal at this value however longer contact times are recommended to provide total flux wash off from the boards. The maximum upper limit will be determined by the level of shorts.

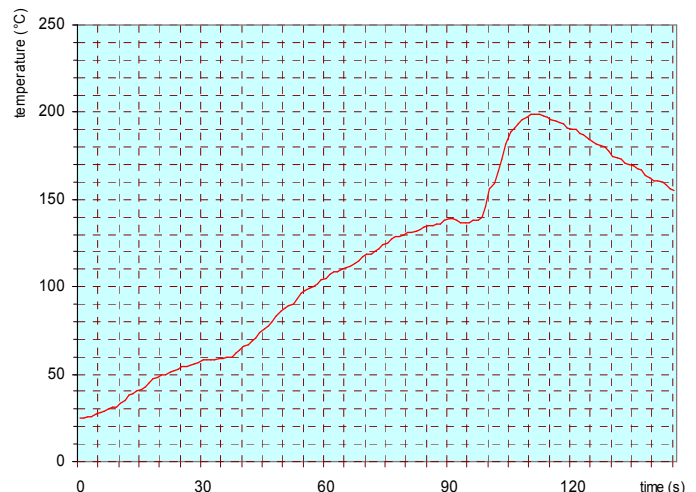

T° measured on the topside of the PCB on a lead-free wave soldering machine.



Handling

Storage

Store the flux in the original packaging, tightly sealed at a preferred temperature of +5° to +25°C

temperature compensation, with the value in the IF 2005M density table and may only be adjusted with the T 2005M accordingly.

of the solid content may only be done by using T 2005M conditioner.

Density control

The density of the IF 2005M flux shall be checked using the IF density meter, the value showed by the density meter should be compared, after

Titration check

The solids content value of the IF 2005M flux shall be determined by using the Titration Kit for IF 2005M. Adjustments

Reuse

Do not mix used and fresh flux.

Test results

conform EN 61190-1-1(2002) and IPC J-STD-004A

Property	Result	Method
Chemical		
Flux designator	OR L0	J-STD-004A
Qualitative copper mirror	pass	J-STD-004A IPC-TM-650 2.3.32
Qualitative halide		
Silver chromate (Cl, Br)	pass	J-STD-004A IPC-TM-650 2.3.33
Quantitative halide	0,00%	J-STD-004A IPC-TM-650 2.3.35
Environmental		
SIR test	pass	J-STD-004A IPC-TM-650 2.6.3.3
Qualitative corrosion, flux	pass	J-STD-004A IPC-TM-650 2.6.15



Packaging:

IF 2005M is available in the following packages:

- 10 litres polyethylene drums
- 25 litres polyethylene drums
- 200 litres polyethylene drums

D i s c l i m e r

Because we cannot anticipate or control the many different conditions under which this information and our products may be used, we do not guarantee the applicability or the accuracy of this information or the suitability of our products in any given situation. Users of our products should make their own test to determine the suitability of each such product for their particular purposes. The product discussed is sold without such warranty, either express or implied.

Product information in other European languages can be obtained at Interflux® Electronics NV, 9042 Gent. Because we cannot anticipate or control the many different conditions under which this information and our products may be used, we do not guarantee the applicability or the accuracy of this information or the suitability of our products in any given situation. Users of our products should make their own tests to determine the suitability of each such product for their particular purposes. The products discussed are sold without such warranty, either expressed or implied.

Copyright:

INTERFLUX® ELECTRONICS

For the latest version of this document please consult:

www.interflux.com