


J-FET INPUT SINGLE OP-AMPS

- LOW POWER CONSUMPTION
- WIDE COMMON-MODE AND DIFFERENTIAL VOLTAGE RANGE
- LOW INPUT BIAS AND OFFSET CURRENT
- OUTPUT SHORT-CIRCUIT PROTECTION
- HIGH INPUT IMPEDANCE J-FET INPUT STAGE
- INTERNAL FREQUENCY COMPENSATION
- LATCH UP FREE OPERATION
- HIGH SLEW RATE : 13 V/ μ s (typ)

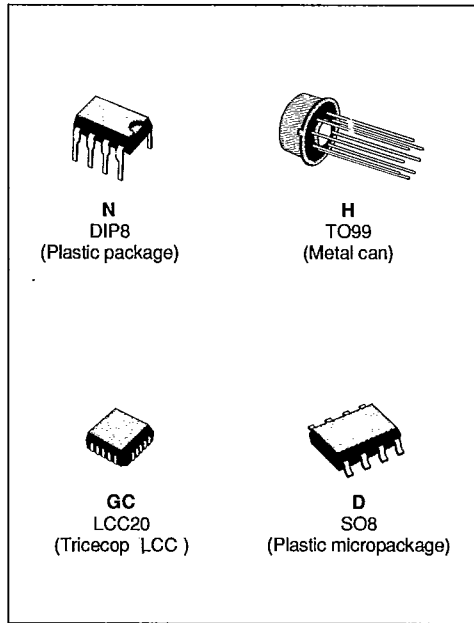


DESCRIPTION



These circuits are high speed J-FET input single operational amplifiers incorporating well matched, high voltage J-FET and bipolar transistors in a monolithic integrated circuit.

The devices feature high slew rates, low input bias and offset currents, and low offset voltage temperature coefficient.

PIN CONNECTIONS (Top views)



- 1 - Balance
- 2 - Inverting input
- 3 - Non-inverting input
- 4 - V_{CC}
- 5 - Balance
- 6 - Output
- 7 - V_{CC}
- 8 - NC



- 1 - NC
- 2 - Balance
- 3 - NC
- 4 - NC
- 5 - Inverting input
- 6 - NC
- 7 - Non-inverting input
- 8 - NC
- 9 - NC
- 10 - V_{CC}
- 11 - NC
- 12 - Balance
- 13 - NC
- 14 - NC
- 15 - Output
- 16 - NC
- 17 - V_{CC}
- 18 - NC
- 19 - NC
- 20 - NC

ORDER CODES

S G S-THOMSON

T-79-15

30E D

| Part Number | Temperature | Package |
|-------------|-------------------|-----------|
| LF151GC | -55 °C to +125 °C | LCC |
| LF151AGC | -55 °C to +125 °C | LCC |
| LF151BGC | -55 °C to +125 °C | LCC |
| LF151H | -55 °C to +125 °C | METAL CAN |
| LF151AH | -55 °C to +125 °C | METAL CAN |
| LF151BH | -55 °C to +125 °C | METAL CAN |
| LF251N | -40 °C to +105 °C | DIP8 |
| LF251AN | -40 °C to +105 °C | DIP8 |
| LF251BN | -40 °C to +105 °C | DIP8 |
| LF251D | -40 °C to +105 °C | SO8 |
| LF251AD | -40 °C to +105 °C | SO8 |
| LF251BD | -40 °C to +105 °C | SO8 |
| LF351N | 0 °C to +70 °C | DIP8 |
| LF351AN | 0 °C to +70 °C | DIP8 |
| LF351BN | 0 °C to +70 °C | DIP8 |
| LF351D | 0 °C to +70 °C | SO8 |
| LF351AD | 0 °C to +70 °C | SO8 |
| LF351BD | 0 °C to +70 °C | SO8 |

ABSOLUTE MAXIMUM RATINGS


| Symbol | Parameter | Value | Unit |
|-------------------|--|---|------|
| V _{CC} | Supply Voltage (note 1) | ± 18 | V |
| V _i | Input Voltage (note 3) | ± 15 | V |
| V _{CC} | Diff. Input Voltage (note 2) | ± 30 | V |
| P _{tot} | Power Dissipation | 680 | mW |
| | Output Short-circuit Duration (note 4) | Infinite | |
| T _{oper} | Operating Free Air Temperature Range | LF351, A, B 0 to 70 LF251, A, B -40 to 105 LF151, A, B -55 to 125 | °C |
| T _{stg} | Storage Temperature Range | -65 to 150 | °C |

- Notes : 1. All voltage values, except differential voltage, are with respect to the zero reference level (ground) of the supply voltages where the zero reference level is the midpoint between V_{CC} and V_{CC}.
2. Differential voltages are at the non-inverting input terminal with respect to the inverting input terminal.
3. The magnitude of the input voltage must never exceed the magnitude of the supply voltage or 15 volts, whichever is less.
4. The output may be shorted to ground or to either supply. Temperature and/or supply voltages must be limited to ensure that the dissipation rating is not exceeded.

SCHEMATIC DIAGRAM

S G S-THOMSON

30E D

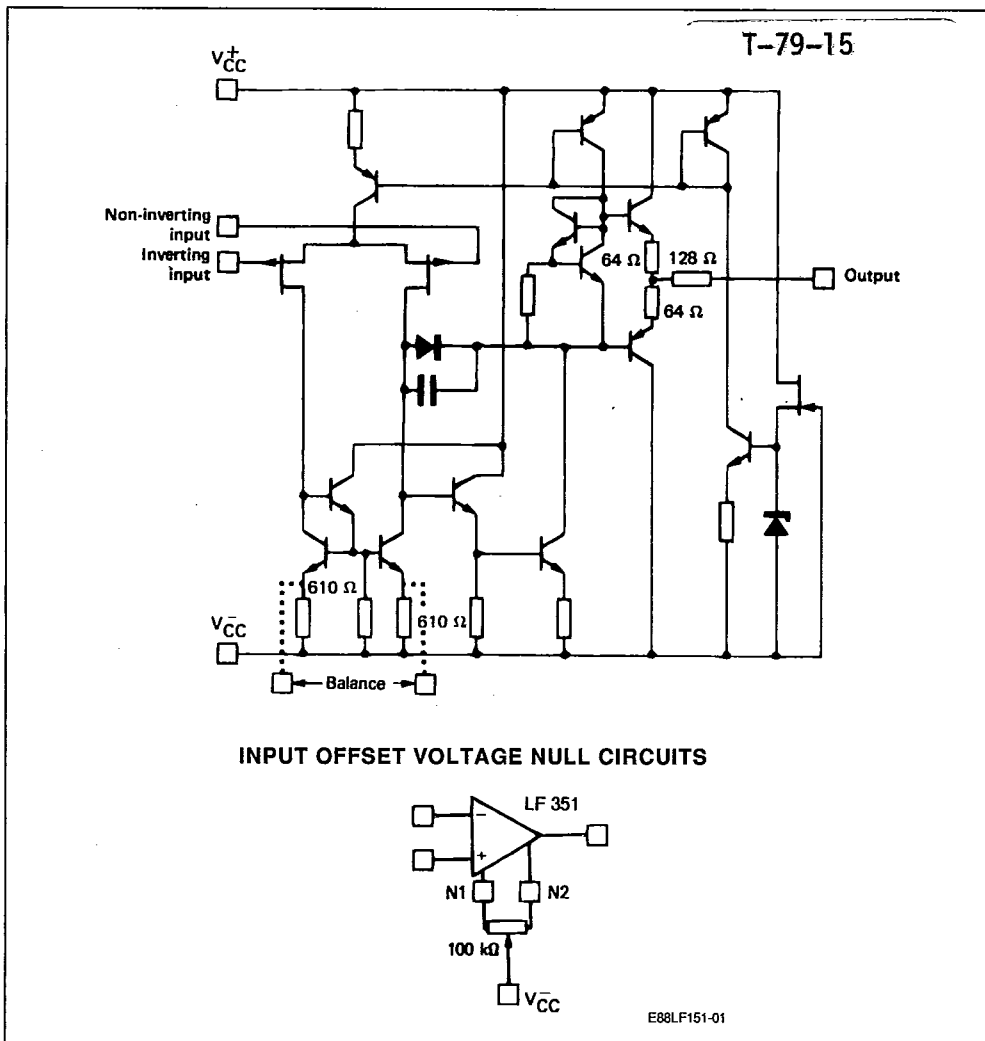

| Case | Balance | Inverting Input | Non-Inverting Input | Output | V_{CC} | V_{CC} | N.C. |
|---------------------|---------|-----------------|---------------------|--------|----------|----------|------|
| DIP8 SO8 TO99 | 1, 5 | 2 | 3 | 6 | 7 | 4 | 8 |
| LCC20 | 2, 12 | 5 | 7 | 15 | 17 | 10 | * |

* LCC20 : Other pins are not connected.

ELECTRICAL CHARACTERISTICS

$V_{CC} = \pm 15$ V (unless otherwise specified)

LF151, LF151A, LF151B $-55 \leq T_{amb} \leq +125$ °C

LF251, LF251A, LF251B $-40 \leq T_{amb} \leq +105$ °C

LF351, LF351A, LF351B $0 \leq T_{amb} \leq +70$ °C

T-79-15

| Symbol | Parameter | LF151A, B LF251A, B LF351A, B | | | LF151 LF251 LF351 | | | Unit |
|---------------|---|-------------------------------------|--|------------|-------------------------|----------------------|------------|------------|
| | | Min. | Typ. | Max. | Min. | Typ. | Max. | |
| V_{io} | Input Offset Voltage ($R_S < 10$ k Ω) $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$ | 3 1 | 5 2 9 5 | | | 3 | 8 13 | mV |
| DV_{io} | Input Offset Voltage Drift | | 10 | | | 10 | | μ V/°C |
| I_{io} | Input Offset Current * $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$ | | 5 | 50 4 | | 5 | 50 4 | pA nA |
| I_{ib} | Input Bias Current * $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$ | | 20 | 200 20 | | 20 | 200 20 | pA nA |
| A_{vd} | Large Signal Voltage Gain ($R_L > 2$ k Ω , $V_o = \pm 10$ V) $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$ | 50 25 | 200 | | 50 25 | 200 | | V/mV |
| SVR | Supply Voltage Rejection Ratio ($R_S < 10$ k Ω) $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$ | 80 80 | 86 | | 80 80 | 86 | | dB |
| I_{cc} | Supply Current, no Load $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$ | | 1.4 | 2.5 2.5 | | 1.4 | 2.5 2.5 | mA |
| V_i | Input Voltage Range $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$ | -11 | | +11 | -11 | | +11 | V |
| CMR | Common Mode Rejection Ratio ($R_S < 10$ k Ω) $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$ | 80 80 | 86 | | 70 70 | 86 | | dB |
| I_{os} | Output Short-circuit Current $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$ | 10 10 | 40 | 60 60 | 10 10 | 40 | 60 60 | mA |
| $\pm V_{opp}$ | Output Voltage Swing $T_{amb} = 25$ °C $T_{min} \leq T_{amb} \leq T_{max}$ | | $R_L \geq 2$ k Ω 11 $R_L \geq 10$ k Ω 12 $R_L \geq 2$ k Ω 11 $R_L \geq 10$ k Ω 12 | 12 13.5 | | 11 12 11 12 | 12 13.5 | V |
| S_{vo} | Slew-rate ($V_i = 10$ V, $R_L = 2$ k Ω) $C_L \leq 100$ pF, $T_{amb} = 25$ °C, unity gain) | 12 | 16 | | 12 | 16 | | V/ μ s |

* The input bias currents are junction leakage currents which approximately double for every 10 °C increase in the junction temperature.



SGS-THOMSON

30E D

ELECTRICAL CHARACTERISTICS (continued)

T-79-15


| Symbol | Parameter | LF151A, B LF251A, B LF351A, B | | | LF151 LF251 LF351 | | | Unit |
|----------|--|-------------------------------------|-----------|------|-------------------------|-----------|------|----------------|
| | | Min. | Typ. | Max. | Min. | Typ. | Max. | |
| t_r | Rise Time ($V_I = 20$ mV, $R_L = 2$ k Ω) $C_L = 100$ pF, $T_{amb} = 25$ $^{\circ}$ C, unity Gain | | 0.1 | | | 0.1 | | μ s |
| K_{ov} | Overshoot ($V_I = 20$ mV, $R_L = 2$ k Ω) $C_L \leq 100$ pF, $T_{amb} = 25$ $^{\circ}$ C, unity gain) | | 10 | | | 10 | | % |
| GBP | Gain Bandwidth Product ($f = 100$ kHz, $T_{amb} = 25$ $^{\circ}$ C) $V_{in} = 10$ mV, $R_L = 2$ k Ω , $C_L = 100$ pF) | 3.3 | 4.0 | 5.0 | 3.3 | 4.0 | 5.0 | MHz |
| R_i | Input Resistance ($T_{amb} = 25$ $^{\circ}$ C) | | 10^{12} | | | 10^{12} | | Ω |
| THD | Total Harmonic Distortion ($f = 1$ kHz, $A_v = 20$ dB, $R_L = 2$ k Ω) $C_L \leq 100$ pF, $T_{amb} = 25$ $^{\circ}$ C, $V_o = 2$ V _{pp}) | | 0.01 | | | 0.01 | | % |
| V_n | Equivalent Input Noise Voltage ($f = 1$ kHz, $R_g = 100$ Ω) | | 15 | | | 15 | | nV/ \sqrt Hz |
| ϕ_m | Phase Margin | | 45 | | | 45 | | Degrees |

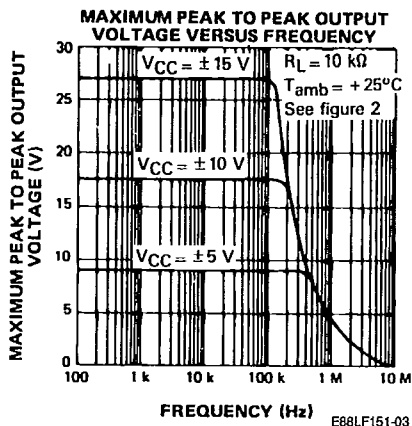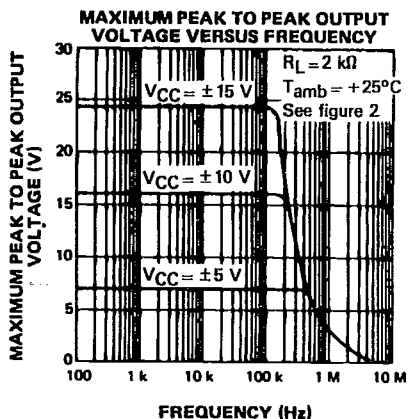


S G S-THOMSON

30E D


MAXIMUM PEAK TO PEAK OUTPUT VOLTAGE VERSUS FREE-AIR TEMP.

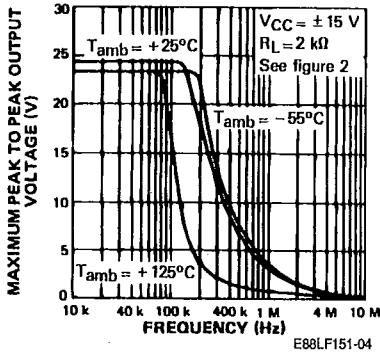


MAXIMUM PEAK TO PEAK OUTPUT VOLTAGE VERSUS FREQUENCY

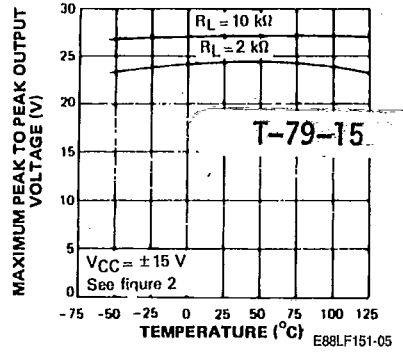


MAXIMUM PEAK TO PEAK OUTPUT VOLTAGE VERSUS LOAD RESISTANCE

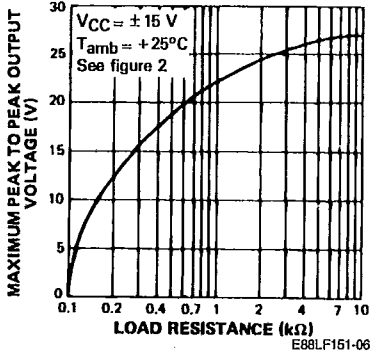


MAXIMUM PEAK TO PEAK OUTPUT VOLTAGE VERSUS SUPPLY VOLTAGE

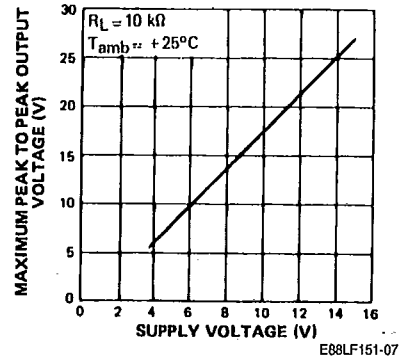

INPUT BIAS CURRENT VERSUS FREE-AIR TEMPERATURE

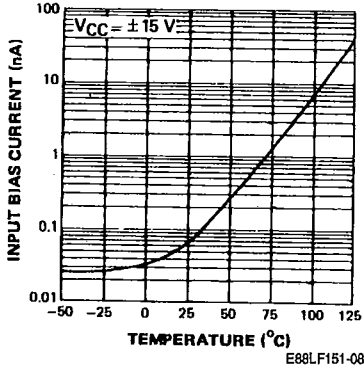


LARGE SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION VERSUS FREE-AIR TEMPERATURE

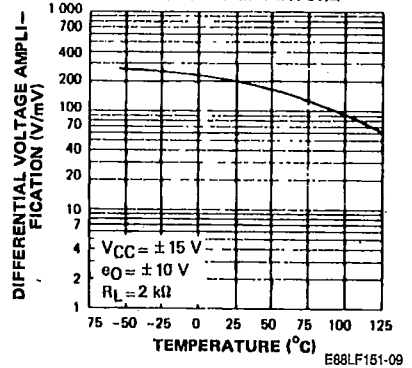


S G S-THOMSON

LARGE SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION AND PHASE SHIFT VERSUS FREQUENCY

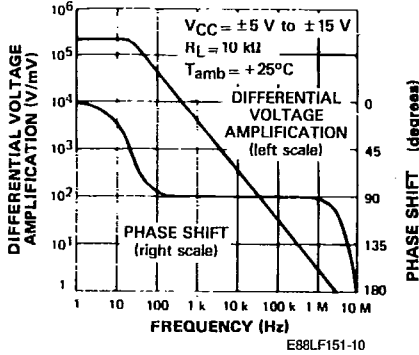


30E D


TOTAL POWER DISSIPATION VERSUS FREE-AIR TEMPERATURE

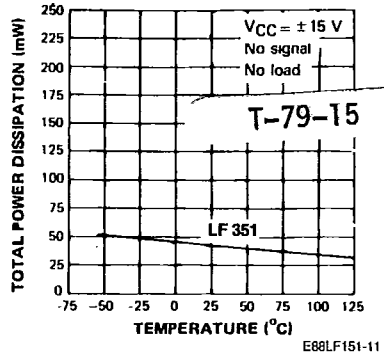


SUPPLY CURRENT PER AMPLIFIER VERSUS FREE-AIR TEMPERATURE

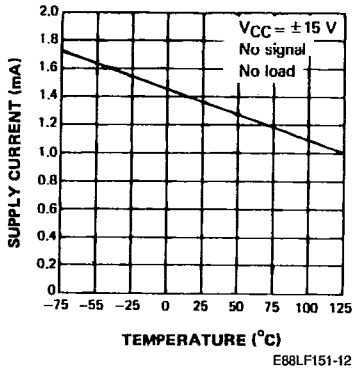


SUPPLY CURRENT PER AMPLIFIER VERSUS SUPPLY VOLTAGE

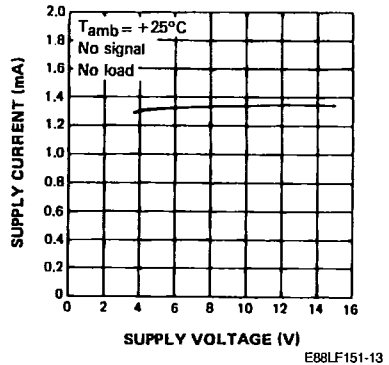

COMMON MODE REJECTION RATIO VERSUS FREE-AIR TEMPERATURE

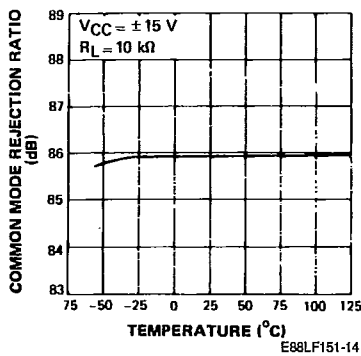


VOLTAGE FOLLOWER LARGE SIGNAL PULSE RESPONSE

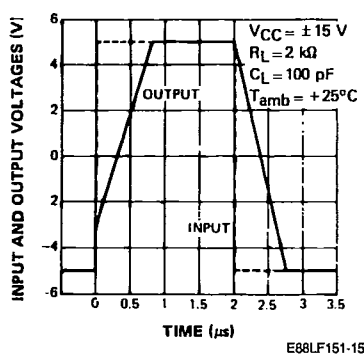


SGS-THOMSON

30E D


OUTPUT VOLTAGE VERSUS TIME

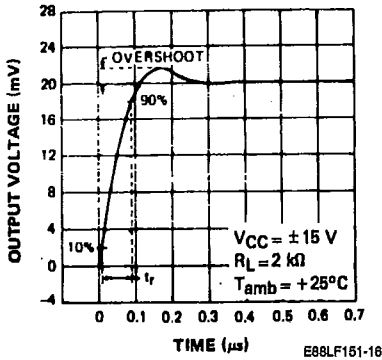

EQUIVALENT INPUT NOISE VOLTAGE VERSUS FREQUENCY

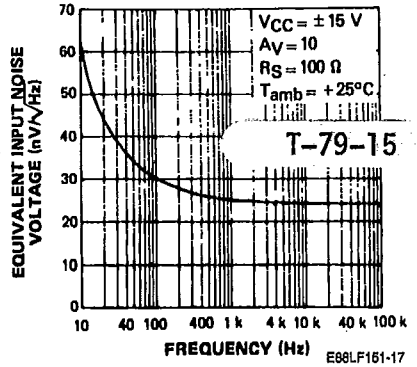


TOTAL HARMONIC DISTORTION VERSUS FREQUENCY

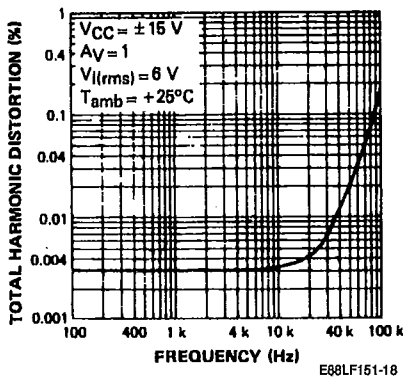


TYPICAL APPLICATIONS

(0.5 Hz) SQUARE WAVE OSCILLATOR

T-79-15

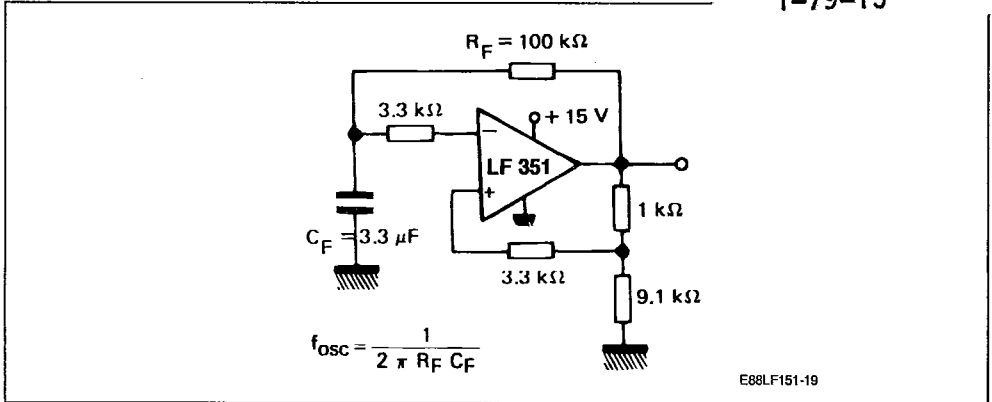

HIGH Q NOTCH FILTER

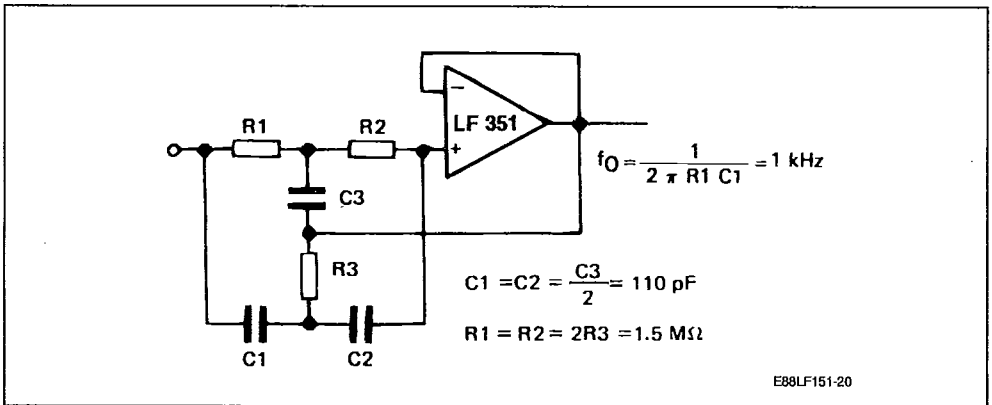

PARAMETER MEASUREMENT INFORMATION

Figure 1 : Voltage Follower.


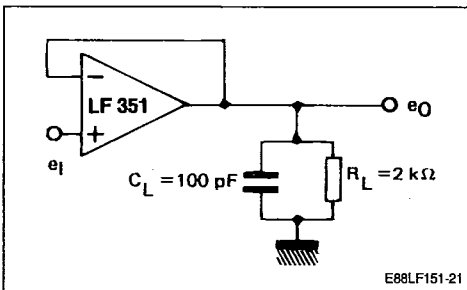



Figure 2 : Gain-of-10 Inverting Amplifier.

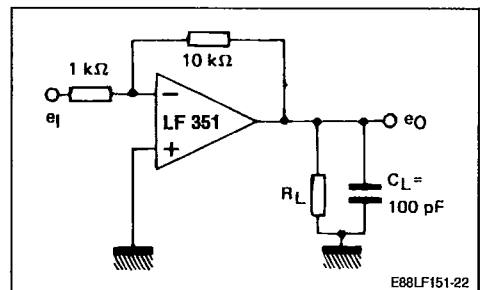


PACKAGE MECHANICAL DATA

8 PINS - PLASTIC DIP

T-79-15

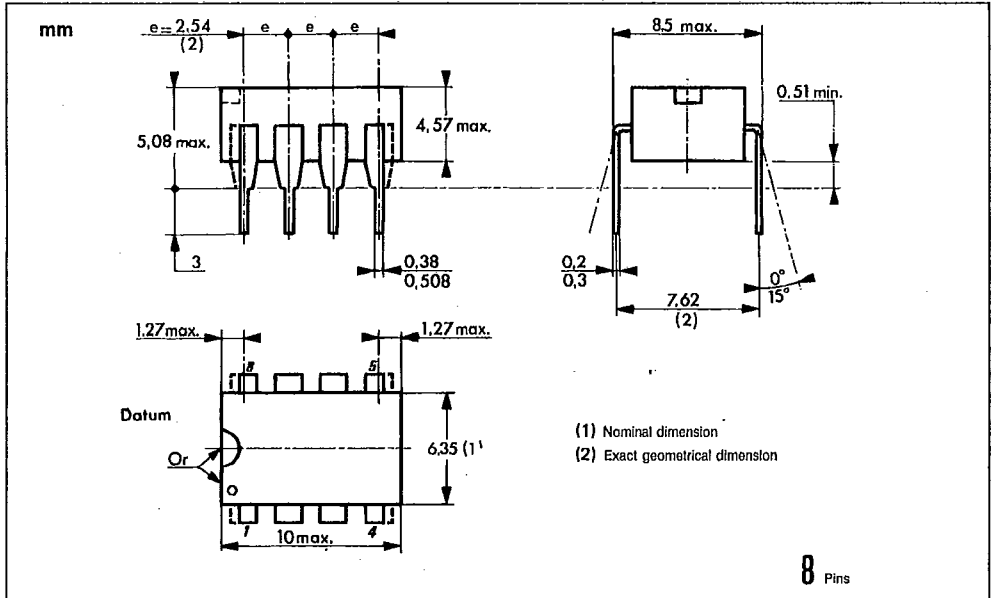


8 PINS - PLASTIC MICROPACKAGE (SO)

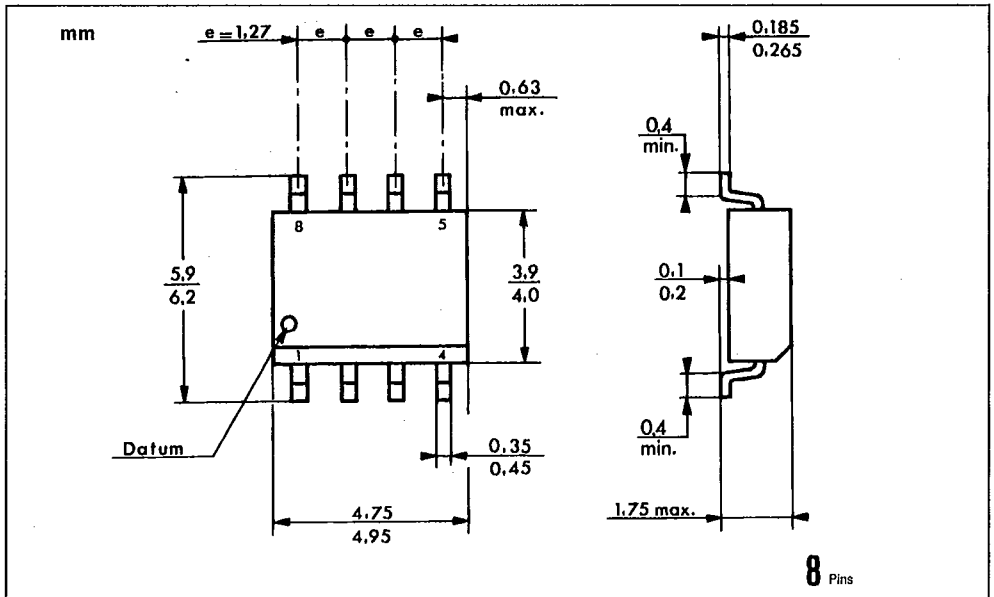

TO99 - METAL CAN

S G S-THOMSON

30E D

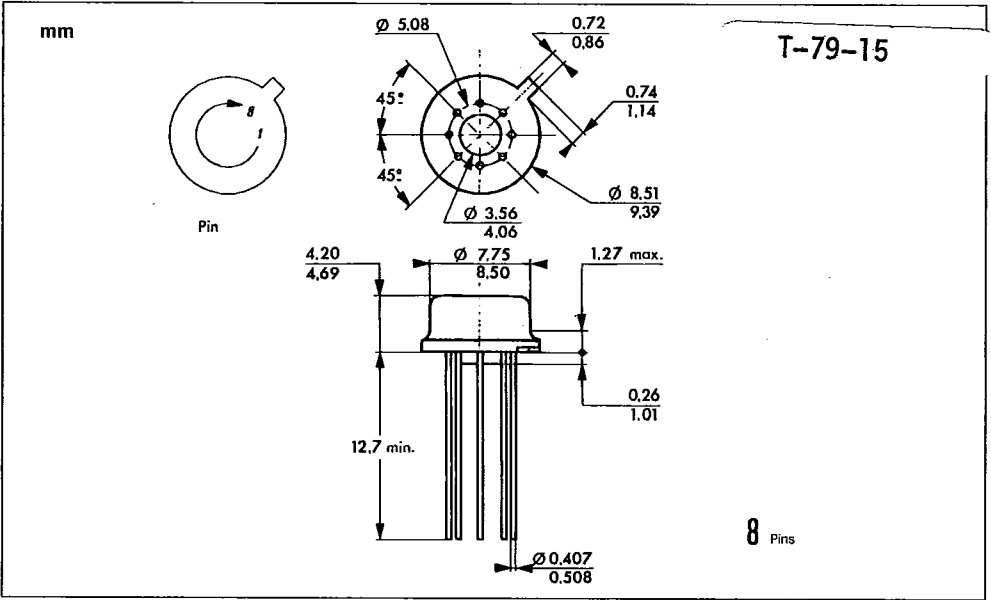

20 PINS - TRICECOP (LCC)

